#### Rev. D

#### **Features**

- High Efficiency (Up to 92%)
- Full Power at 50-100% Max Current (Constant Power)
- DALI Dimmable and Dim-to-Off
- Standby Power ≤1 W
- Input Surge Protection: 4kV line-line, 6kV line-earth
- All-Around Protection: OVP, SCP, OTP
- Waterproof (IP67)
- SELV Output
- Suitable for Independent Use



# **Description**

The *EUD-150SxxxBV* series is a 150W, constant-current, programmable LED driver that operates from 90-305 Vac input with excellent power factor. Created for high bay, tunnel and roadway lights, it provides a dimto-off mode with low standby power. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.


#### **Models**


Output Current	Full-Power	Default	Input	Output Voltage	Max.	Typical Efficiency		Factor	Model Number
Range	Current Range (1)	Output Current	Voltage Range(2)	Range	Output Power	(3)	120Vac	220Vac	(4)
65-1300mA	650-1300mA	700 mA	90~305 Vac/ 127~250 Vdc	69~230Vdc	150 W	92.0%	0.99	0.96	EUD-150S130BV
130-2600mA	1300-2600mA	2100 mA	90~305 Vac/ 127~250 Vdc	35~115Vdc	150 W	91.5%	0.99	0.96	EUD-150S260BV
260-5200mA	2600-5200mA	4200 mA	90~305 Vac/ 127~250 Vdc	18 ~ 58Vdc	150 W	90.5%	0.99	0.96	EUD-150S520BV (SELV)

Notes: (1) Output current range with constant power at 150W

- (2) Certified input voltage range: 100-240Vac or 127-250Vdc (except CCC and KS)
- (3) Measured at a 220Vac input with 100% maximum output current and 50% maximum output voltage.
- (4) All the models are certificated to KS, except EUD-150S130BV

# **I-V Operating Area**





1/10



Rev. D

**Input Specifications** 

Parameter	Min.	Тур.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	127~250 Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz
Innut AC Current	-	-	1.8 A	Measured at full load and 100 Vac input.
Input AC Current	-	-	0.85 A	Measured at full load and 220 Vac input.
Inrush Current(I <sup>2</sup> t)	-	-	1.4 A <sup>2</sup> s	At 220Vac input, 25°C Cold Start, Duration=1.46 mS, 10%lpk-10%lpk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 100-277Vac, 60%-100% Load
THD	-	-	20%	(90-150W)

**Output Specifications** 

Cutput Openincations						
Parameter	Min.	Тур.	Max.	Notes		
Output Current Tolerance	-5%loset	-	5%loset	At full load condition		
Output Current Setting(loset) Range	5%lomax	-	100%lomax			
Output Current Setting Range with Constant Power	50%lomax	-	100%lomax			
Total Output Current Ripple (pk-pk)	-	5%lomax	10%lomax	At full load condition, 20 MHz BW		
Output Current Ripple at < 200 Hz (pk-pk)	-	2%lomax	-	At full load condition. Only this component of ripple is associated with visible flicker.		
Startup Overshoot Current	-	-	10%lomax	At full load condition		
No Load Output Voltage EUD-150S130BV EUD-150S260BV EUD-150S520BV	- - -	- - -	275V 138V 70V			
Line Regulation	-	-	±0.5%	Measured at full load		
Load Regulation	-	-	±1.5%			
Turn-on Delay Time	-	0.8 s	1.5 s	Measured at 120Vac and 220Vac input.		
Temperature Coefficient of loset	-	-	0.03%/°C	Case temperature = 0°C ~Tc max		

**Note:** All specifications are typical at 25°C unless otherwise stated.

Rev. D

# **General Specifications**

Parameter	Min. Typ. Max.		Max.	Notes		
Efficiency at 120 Vac input:						
EUD-150S130BV	86.0%	89.0%				
lo=650 mA	86.0% 87.0%	90.0%	-	Measured at full load and steady-state		
lo=1300 mA EUD-150S260BV	07.070	90.070	-	temperature in 25°C ambient;		
lo=1300 mA	86.5%	89.5%	-	(Efficiency will be about 2.0% lower if		
lo= 2600mA	86.5%	89.5%	_	measured immediately after startup.)		
EUD-150S520BV				, ,		
Io= 2600mA	86.5%	89.5%	-			
lo= 5200mA	85.5%	88.5%	_			
Efficiency at 220 Vac input:						
EUD-150S130BV						
lo=650 mA	89.0%	91.0%	-			
Io=1300 mA	90.0%	92.0%	-	Measured at full load and steady-state		
EUD-150S260BV	89.5%	91.5%		temperature in 25°C ambient; (Efficiency will be about 2.0% lower if		
Io=1300 mA Io= 2600mA	89.5%	91.5%	-	measured immediately after startup.)		
EUD-150S520BV	03.070	31.370		measured infinediately after startup.)		
lo= 2600mA	89.5%	91.5%	-			
lo= 5200mA	88.5%	90.5%	-			
Efficiency at 277 Vac input:						
EUD-150S130BV						
Io=650 mA	89.5%	91.5%	_			
Io=1300 mA	90.5%	92.5%	-	Measured at full load and steady-state		
EUD-150S260BV				temperature in 25°C ambient;		
Io=1300 mA	89.5%	91.5%	-	(Efficiency will be about 2.0% lower if		
lo= 2600mA	90.0%	92.0%	-	measured immediately after startup.)		
EUD-150S520BV	89.5%	91.5%				
Io= 2600mA Io= 5200mA	89.0%	91.0%	-			
10- 5200IIIA	00.070	01.070				
Standby power	-	-	1 W	Measured at 230Vac/50Hz; Dimming off		
				Measured at 220Vac input, 80%Load and		
MTBF	-	236,000	_	25°C ambient temperature (MIL-HDBK-		
		Hours		217F)		
		120,000		Measured at 220Vac input, 80%Load and		
Lifetime	-	Hours	-	60°C case temperature; See lifetime vs. Tc		
		110010		curve for the details		
Operating Case Temperature	-40°C	_	+89°C			
for Safety Tc_s						
Operating Case Temperature for Warranty Tc w	-40°C	-	+70°C			
<u> </u>						
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH		
Dimensions		<u> </u>		With mounting ear		
Inches (L × W × H)	8	.62× 2.66 × 1.56	6	9.67 × 2.66 × 1.56		
Millimeters (L × W × H)	2	19 × 67.5 × 39.5	5	246 × 67.5 × 39.5		
Net Weight	_	1210 g	_			

**Note**: All specifications are typical at 25°C unless otherwise stated.

Rev. D

**Dimming Specifications** 

Parameter	Min.	Тур.	Max.	Notes
DA1,DA2 High Level	9.5V	16V	22.5V	
DA1,DA2 Low Level	-6.5V	0V	6.5V	
DA1,DA2 Current	0mA	-	2mA	
Dimming Output Dange	10%loset	-	loset	50%lomax ≤ loset ≤ 100%lomax
Dimming Output Range	5%lomax	-	loset	5%lomax ≤ loset < 50%lomax

**Note**: All specifications are typical at 25 °C unless stated otherwise.

### **Standards Compliance**

Safety Category	Standard
CE	EN 61347-1, EN61347-2-13
KS	KS C 7655 : 2011
EMI Standards	Notes
EN 55015 <sup>(1)</sup>	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge(ESD): 8kV air discharge, 4kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient/Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4kV, line to earth 6kV (2)
EN 61000-4-6	Conducted Radio Frequency Disturbances test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment
DALI Standards	Notes
DALI	IEC62386-101,102 & part of 207 (3)

**Note:** (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(2) To perform electric strength (hi-pot) testing, the "GDT ground disconnect" (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is completed, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.


Fax: 86-571-86601139

(3) Optional Commands Implemented: 243 (query open circuit)


4/10

Rev. D


# Lifetime vs. Case Temperature



#### **Inrush Current Waveform**

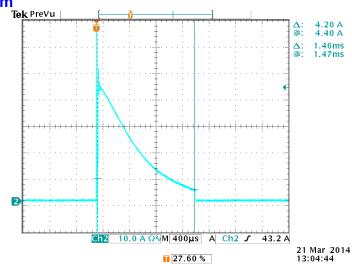


# Efficiency vs. Load

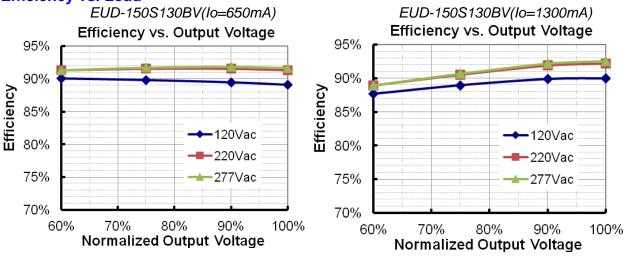


5/10

Fax: 86-571-86601139

Rev. D

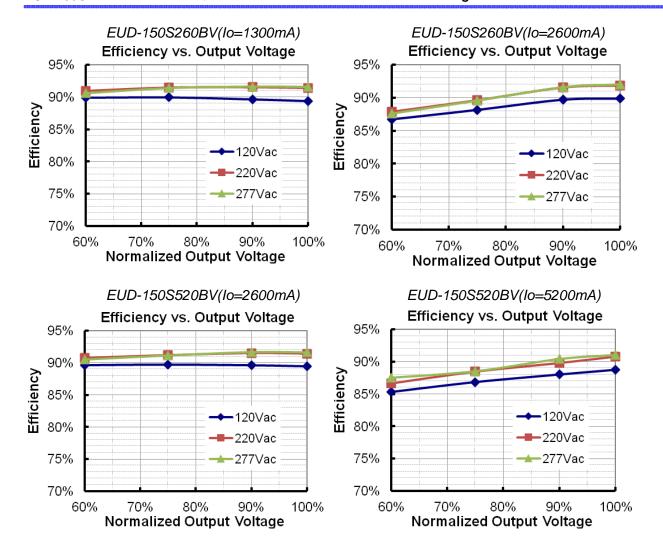

# **Power Factor**

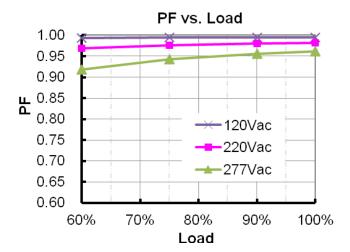


6/10

Fax: 86-571-86601139

Rev. D

### **Total Harmonic Distortion**




### **Protection Functions**

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.


# **Dimming**

### DALI Dimming

The recommended implementation of the dimming control is provided below.




Rev. D

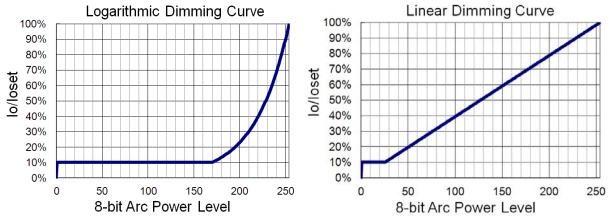

Implementation: DALI Dimming

# **Programming Connection Diagram**

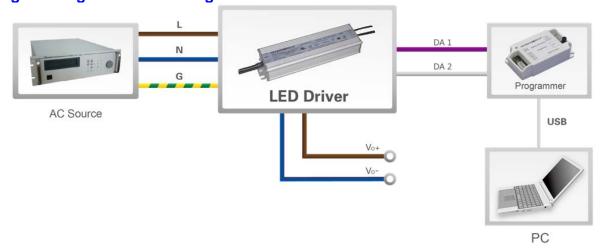


**Note:** The driver needs to be powered on during the programming process.

Please refer to <u>PRG-MUL2</u> Multi-Programmer datasheet for details.

Rev. D

### **Mechanical Outline**

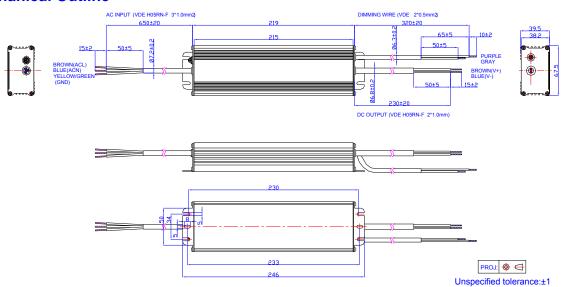

# **RoHS Compliance**

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.





Rev. D

**Revision History** 

Change	Rev.	Description of Change						
Date	Rev.	Item	From	То				
2015-03-13	Α	Datasheets Release	/	/				
		Description	/	Update				
2015-06-01	В	Models	/	Update				
		Mechanical Outline	/	Update				
	С	KS, DALI Logo	/	Added				
0045 00 40		Features	/	Update				
2015-09-16		Safety & EMC Compliance	Safety & EMC Compliance	Standards Compliance				
			Standards Compliance	DALI Standards	Added			
2016-04-13	D	General Specifications	With mounting ear	Added				
		General Specifications	Net Weight	Update				
		Standards Compliance	/	Update				