




ZRM 4.5-ES/C

Lampen	35W	70W	100W	150W	250W	400W
HI/MBI	●	●	●	●	●	●
HS/SON*		●	●	●	●	●

*HS≥4.5KVp only

Type		ZRM 4.5-ES/C
Article number		87500082 - 12307
Rated voltage	V	220-240
Permitted voltage	V	198-264
Mains frequency	Hz	50-60
Ignition voltage	V	4.0-5.0
Lamp wattage HS	W	*70-400
Lamp wattage HI	W	35-400
Temperature rise at IB = 0.54A (35W)	K	0.1
IB = 1.0 A (70W)	K	1
IB = 1.2 A (100W)	K	2
IB = 1.8 A (150W)	K	6.5
IB = 3.0 A (250W)	K	14
IB = 4.6 A (400W)	K	~33.5
Losses at IB = 0.54 A (35W)	W	~0.03
IB = 1.0 A (70W)	W	~0.11
IB = 1.2 A (100W)	W	~0.15
IB = 1.8 A (150W)	W	~0.35
IB = 3.0 A (250W)	W	~1.0
IB = 4.6 A (400W)	W	~2.5
Max. cable capacitance	pF	100
Max. distance from lamp	m	1.5
Max. housing temperature tc	°C	105
Min. operating temperature	°C	-30
Weight	kg	0.13

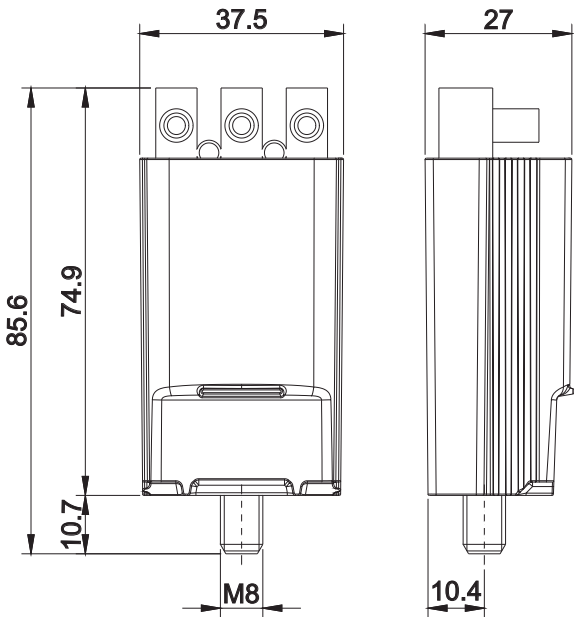

mat.no.:		material:		surface /aftertreatment:				
modifi.no.	modification date	name	general tolerances:		2015	date	name	
1			DATASHEET ZRM 4.5-ES/C		drawn			
2					approx.			
3					scale	1 : 1		
4								
5					drawing number		F	I
6					15003784			
7					 copyright according to ISO 16016			
8								
			Tržaška cesta 23, SI-2000 Maribor					