


FD ..

NEU / NEW

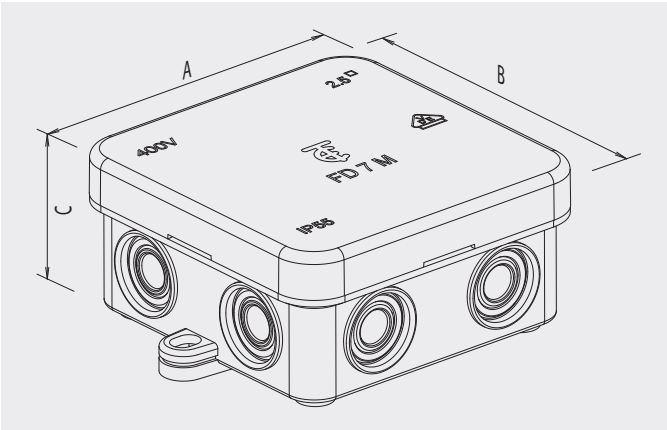

Nennspannung 400 V
Nennquerschnitt 2,5 mm²
Schutzart IP 55
Material Dose Polyäthylen flammwidrig
Deckel Polypropylen flammwidrig

Nominal voltage 400 V
Nominal clamping area 2.5 mm²
IP Protection IP 55
Material Box Polyethylene flame-retardant
Lid Polypropylene flame-retardant

Technische Daten ab Seite 109

Technical data from page 109 onwards

FD	7 / 10 / 12	Art. Nummer Art. number	Gewicht/ Stk. in g Weight/ pc. in g	VPE/ Stk. Packing/ pcs.	Abmessung Dimension A	Abmessung Dimension B	Abmessung Dimension C	Kart. Type Box type
FD	10 S	88168303	30,1	140	80	43	36	X
FD	7 M	88168304	35,7	150	75	75	37	X
FD	12 L	88168305	55,8	80	85	85	40	X

Prüfzeichen | Approvals  (eingereicht | applied for)

Typenschlüssel
FD Feuchtraumdose
7/10/12 Anzahl der Kabeleinführungen

Code index
FD Damp-proof junction box
7/10/12 Number of cable entries