

## KONDOR LED SR

CODE: 06108496



Series of street luminaires for outdoor use, comprising:

Housing and cover in painted die-cast aluminium  
 Pole clamp in die-cast aluminium painted with polyester powder for post top installation Ø 60, Ø 76 or on arms Ø 42 - Ø 60

Diffuser with integrated louvre in UV and heat stabilised transparent technopolymer

High-transparency polycarbonate lenses for best light transmission

Anti-aging silicone gasket with high resiliency

Cable gland M20x1.5 for cables Ø 10- Ø 14 mm

Switch splitter that automatically disconnects the power supply when the cable cover is opened

Light beam obtained by the combination of multiple LED modules

Aluminium heat sink

Stainless steel external screws

Stainless steel attached clips


Galvanised steel gear tray bracket

The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in case of LED failures

Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution

Versions with automatic power reduction are available

On request, versions with dimmable ballast are available

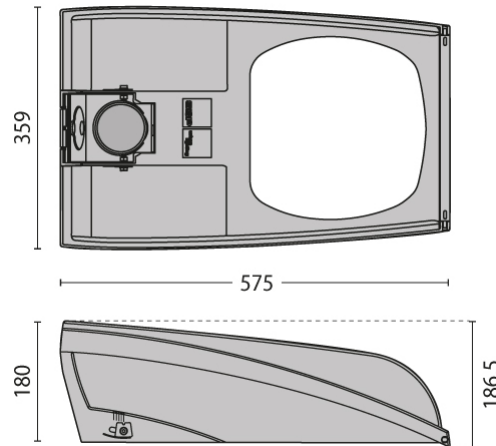

- **Lampholder:** LED
- **Watt:** N.8 LED - 68 W
- **Colour:** SANDBLASTED ANTHRACITE-AKZO NOBEL
- **Insulation class:** II
- **KELVIN:** 4000
- **IK:** IK09 12J xx7
- **COSφ ≥ 0,9**
- **Optic:** ROAD REFLECTOR
- **Nominal lumen output:** 8320 lm
- **Real lumen output:** 7025 lm
- **Lifetime:** 50000 h
- **L:** 70
- **Code:** 06108496

